
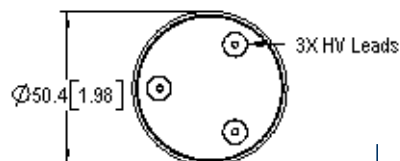


G64A - G64B - G64C

50 kV

Make Only Load Switching
RoHS Compliant

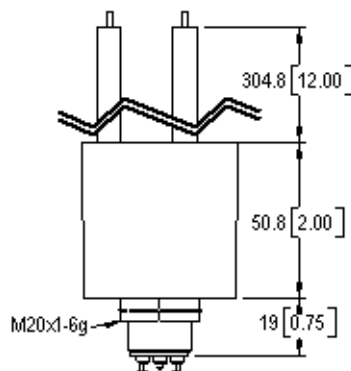

FEATURES

G64A & G64B & G64C

Make Only Load Switchings

- Compact design saves precious space while isolating 50kV
- Flying leads provide versatile high voltage connections
- Excellent for capacitive discharge and safety dump switch applications
- Effectively bounce free operation

PRODUCT SPECIFICATIONS

Contact & Relay Ratings	Units	G64A	G64B	G64C
Contact Form		A	B	C
Contact Arrangement		SPST-NO	SPST-NC	SPDT
Voltage, Test Max., Contacts & to Base (15 μ A Leakage Max, dc or 60Hz)	kV Peak	55	55	55
Voltage, Operating Max., Contacts & to Base (15 μ A Leakage Max.)				
dc	kV Peak	50	50	50
60 Hz RMS	kV Peak	30	30	30
2.5 MHz	kV Peak	-	-	-
16 MHz	kV Peak	-	-	-
32 MHz	kV Peak	-	-	-
Current, Continuous Carry Max				
dc or 60 Hz	Amps	10	10	10
2.5 MHz	Amps	-	-	-
16 MHz	Amps	-	-	-
32 MHz	Amps	-	-	-
Coil Hi-Pot (V RMS, 60 Hz)	V	500	500	500
Capacitance				
Across Open Contacts	pF	-	-	-
Contacts to Ground	pF	-	-	-
Resistance, Contact Max @ 1A, 28 Vdc	ohms	1.0	1.0	1.0
Operate Time	ms	15	15	15
Release Time	ms	15	15	15
Life, Mechanical	cycles	1 million	1 million	1 million
Weight, Nominal	g (oz)	336 (12)	336 (12)	336 (12)
Vibration, Operating, Sine (55-500 Hz Peak)	G's	10	10	10
Shock, Operating, 1/2 Sine 11ms (Peak)	G's	10	10	10
Temperature Ambient Operating	°C	-55 to +85	-55 to +85	-55 to +85

COIL RATINGS

Nominal, Volts dc	12	26.5	115
Pick-up, Volts dc, Max.	9	18	90
Drop-Out, Volts dc	0.5-5	1-10	5-50
Coil Resistance (Ohms $\pm$ 10%)	18	75	1300

Ratings listed are for 25°C, sea level conditions

For more information, refer to

[Relay User Instructions](#)

G64

A 7 4 1

Contact Form

- A = SPST-NO
- B = SPST-NC
- C = SPDT

Coil Voltage

- 7 = 12 Vdc, Turret Terminal
- 8 = 26.5 Vdc, Turret Terminal
- 9 = 115 Vdc, Turret Terminal

High Voltage Connections

- 4 = Flying Leads, 12"
- 7 = Flying Leads, 72"
- 8 = Flying Leads, 36"

Mounting

- 1 = Threaded