

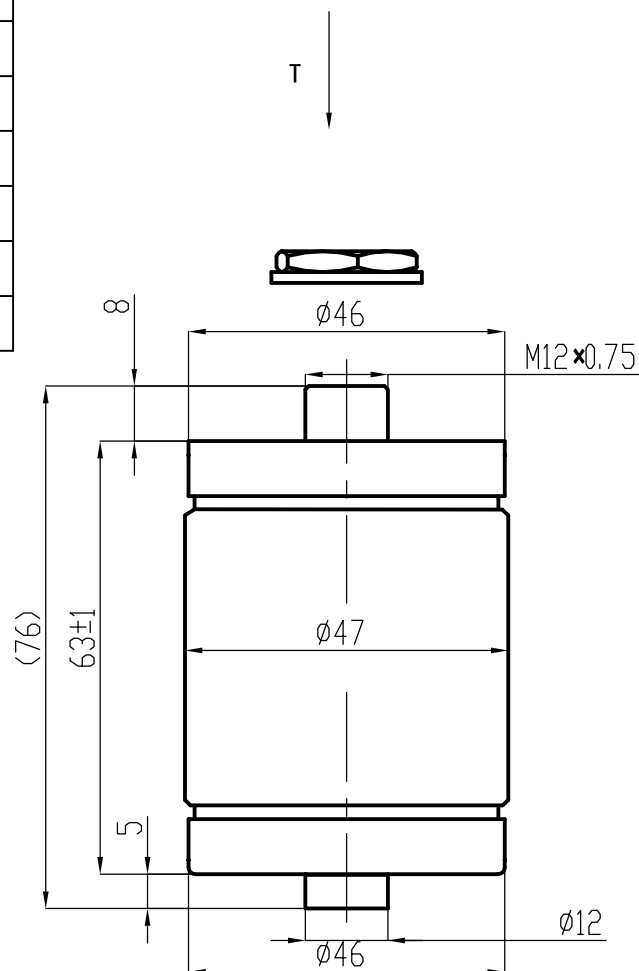


| Specification                                        |             |
|------------------------------------------------------|-------------|
| Capacity $C_{\max}$ (nominal)                        | 125pF       |
| Capacity $C_{\min}$ (nominal)                        | 115pF       |
| Voltage (Peak Test $U_{pt}$ /Peak Working $U_{pw}$ ) | 30kVp/18kVp |
| Max. Current $I_{\max}$ at 13.56MHz with             | 101Arms     |
| Conduction Cooling                                   | 20W         |
| Capacitance per turn                                 | 3pF         |
| Torque                                               | < 0.2N · m  |
| Net Weight                                           | 0.7kg       |


$I_{\max}$  at 25 °C ambient and 125 °C surface for convection and conduction (20W) cooling

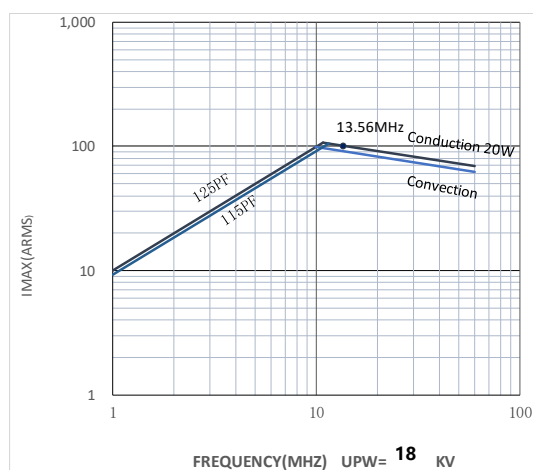

VIEW B

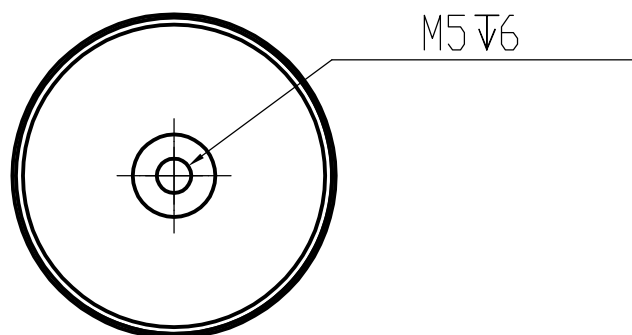

VIEW T



SETTING SCREW  
3MM HEX

UNLESS OTHERWISE SPECIFIED:

≤30: ±0.5 30~400: ±1.2 ≥400: ±2.5 ∠±1°

Rev:00

Page: 1/1

Issue: 12-Nov-2020