


Specification	
Capacity $C_{\max}$ (nominal)	650pF
Capacity $C_{\min}$ (nominal)	8pF
Voltage (Peak Test U_{pt} /Peak Working U_{pw})	5kV/3kV
Capacity tolerance (liner Range)	10%
Max. Current $I_{\max}$ at 13.56MHz with	63Arms
Conduction Cooling	20W
Capacitance per turn	78.6pF/turn
Torque	$\leq 0.15\text{Nm}$
Net Weight	0.4kg



$I_{\max}$ at ambient and 125 °C surface temp. for convection and conduction (20w) cooling

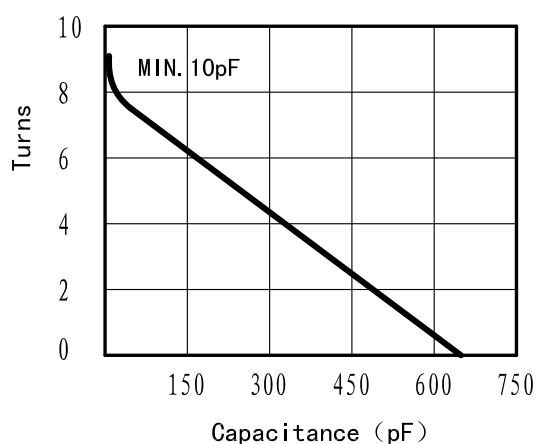