





Data-Sheet-Variable Vacuum Capacitor

CKTBS1000/5/150





www.glvac.com

Specification	
Capacity $C_{\max}$ (nominal)	1000pF
Capacity $C_{\min}$ (nominal)	100pF
Voltage (Peak Test U_{pt} /Peak Working U_{pw})	5KVp/3KVp
Capacity Tolerance (Linear Range)	10%
Max. Current $I_{\max}$ at 13.56MHz with	150Arms
Water Cooling	1 L/min
Capacitance per turn	58.4pF/turn
Turns	16.5 ± 1
Torque	$\leq 0.2 \text{ N} \cdot \text{m}$
Net Weight	1.7kg

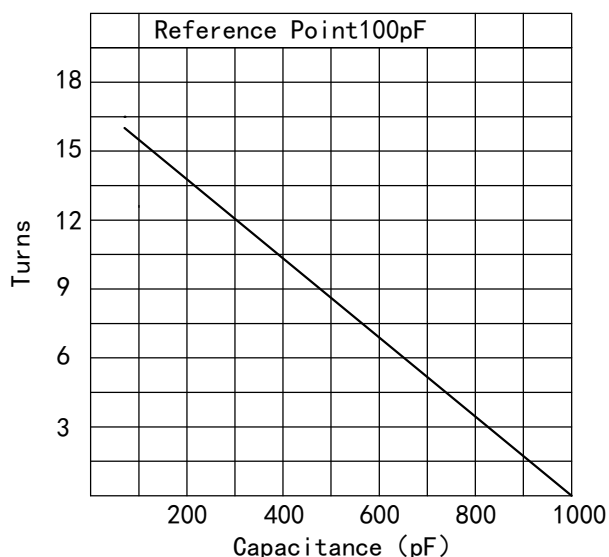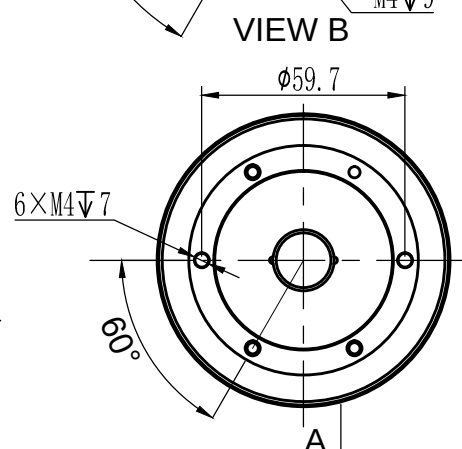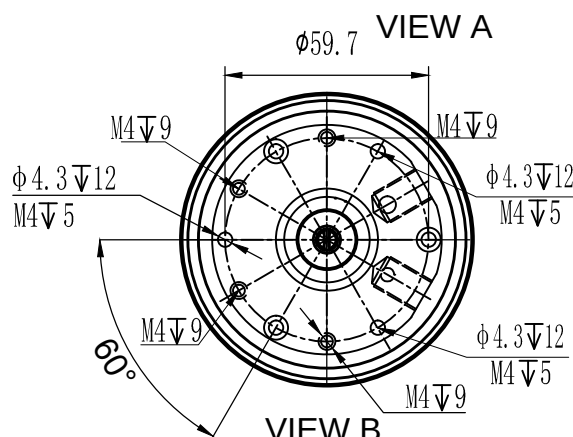

$I_{\max}$ for 1L/min water cooling;
max. water temp. at inlet: 70°C

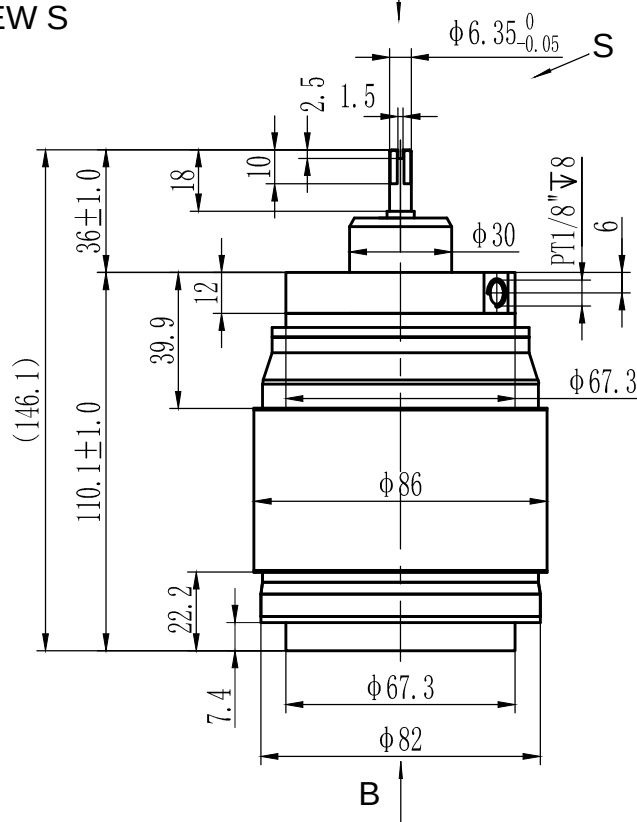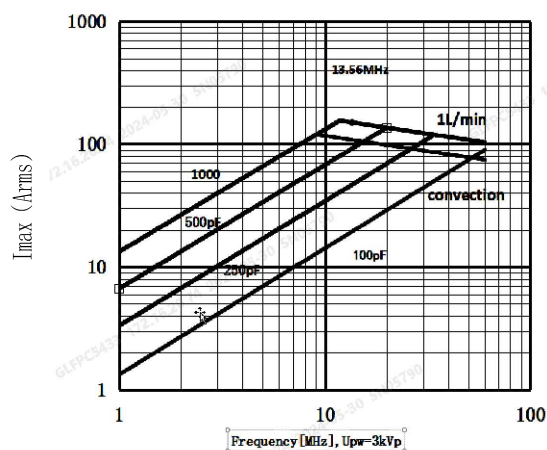

UNLESS OTHERWISE SPECIFIED:

≤ 30 : ± 0.5 30~400: ± 1.2 ≥ 400 : ± 2.5 $\angle$: $\pm 1^\circ$

Rev: 10

Page1/1

Issue: 03-Sep-2024

Address: ST28 Xihu Road, Kunshan, Jiangsu Province, China
TEL: +86 (512) 36872110

Web: www.glvac.com
FAX: +86 (512) 36872122

E-mail: e-sales@glvac.cn
Zip Code: 215333