




# Data-Sheet-Variable Vacuum Capacitor CKTB450/28/138



www.glvac.com

Specification	
Capacity $C_{max}$ (nominal)	450pF
Capacity $C_{min}$ (nominal)	25pF
Voltage (Peak Test $U_{pt}$ /Peak Working $U_{pw}$ )	40kV/24kV
Capacity tolerance (liner Range)	10%
Max. Current $I_{max}$ at 13.56MHz with Conduction Cooling	138Arms
Capacitance per turn	13.5pF/turn
Torque	$\leq 1.5$ N.m
Net Weight	5.6kg

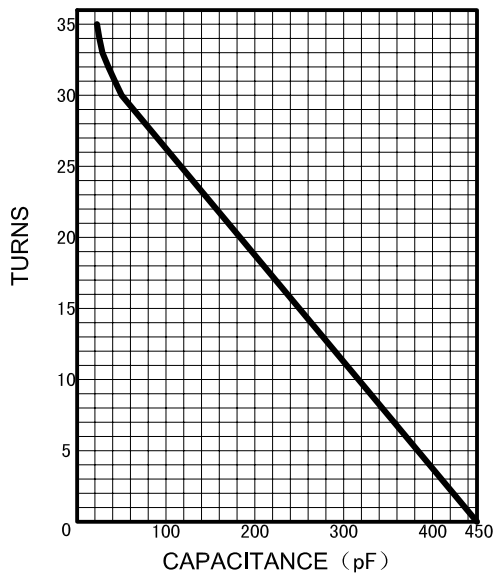

BOTH ENDS ALTERNATING 6 HOLES 1/4"-20 UNC 0.35 INCHES DEEP MIN AND 6 HOLES M6 9 MM DEEP MIN

