


Outline Drawing

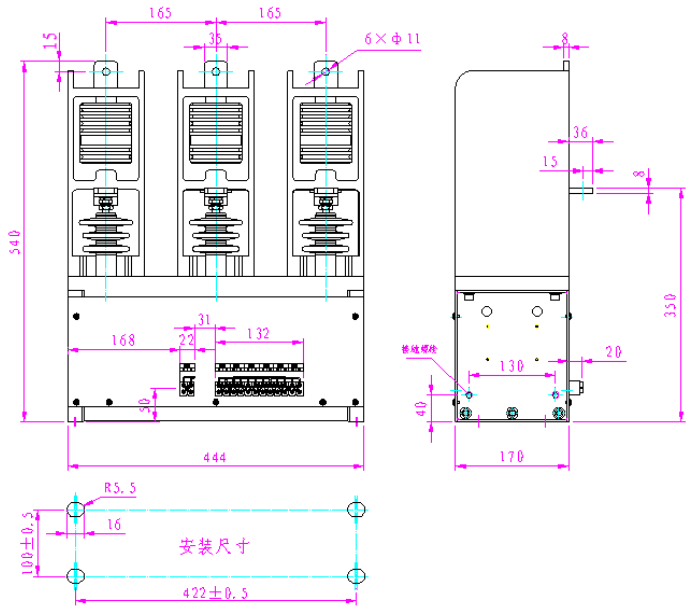

CKG4-250A/12kV AC Vacuum Contactor
(Electrical Latching)

| Technical Parameters | | |
|---|--------------|------------------------|
| Rated Voltage | kV | 12 |
| Rated Current | A | 250 |
| Rated Making Capacity | A/100 Times | 2500 |
| Rated Breaking Capacity | A/25 Times | 2000 |
| Limited Breaking Capacity | A/3 Times | 2500 |
| Rated short time withstand current (2S) | kA | 2500 |
| Rated peak withstand current | A | 6250 |
| Mechanical Life | Times | 5×10^5 |
| Electrical Life | Times | 1×10^5 |
| Weight | kg | 30 |
| Control Power Voltage | V(AC/DC) | 110、220 |
| Pick-up Power | W(transient) | 1000 |
| Hold Power | W | 130 |
| Auxiliary Contact | | 3 pairs NO, 3 pairs NC |