


Outline Drawing

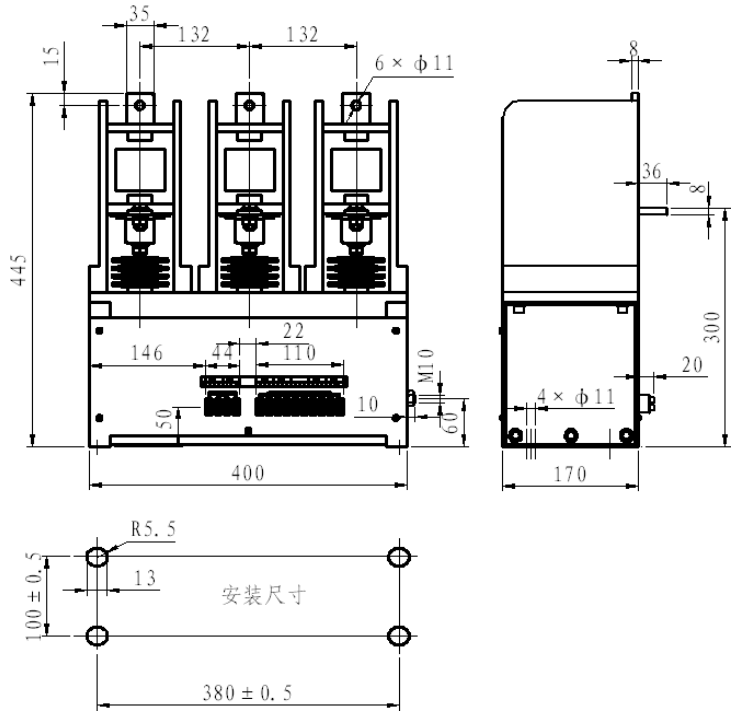

**CKG4-630A/7.2kV AC Vacuum Contactor
(Electrical Latching)**

Technical Parameters		
Rated Voltage	kV	7.2
Rated Current	A	630
Rated Making Capacity	A/100 Times	6300
Rated Breaking Capacity	A/25 Times	5000
Limited Breaking Capacity	A/3 Times	6300
Rated short time withstand current (2S)	kA	6300
Rated peak withstand current	A	15750
Mechanical Life	Times	5 × 10 ⁵
Electrical Life	Times	1 × 10 ⁵
Weight	kg	25
Control Power Voltage	V (AC/DC)	110、220
Pick-up Power	W (transient)	1000
Hold Power	W	130
Auxiliary Contact		3 pairs NO, 2 pairs NC

5XFYgg GH(% 'Gi | | i ' FcUž?i bg\Ubž>] Ub[gi ' Df c j | bWž7\] bU KYV. www. glvac. cca 9! aU] ` . e-sales@glvac. cn
 H@+86 (512) 57735621 : 5L Ž86 (512) 57777020 N| d' 7cXY. 215316